

Products in Family


GRSU27-1333/2GB (1 x 2GB 2Rx8 DIMMs)
 GRUSU27-1333/4GB (1 x 4GB 2Rx8 DIMMs)



Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V ± 0.075 Fully RoHS Compliant Thermal Sensor	Each GRSU27-1333 upgrade consists of a single DDR3-1333 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect. A thermal sensor accurately monitors the DIMM and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
GRSU27-1333/2GB GRSU27-1333/4GB	X3914A Not Offered by Sun	Sun Ultra 27 Workstation

Front view

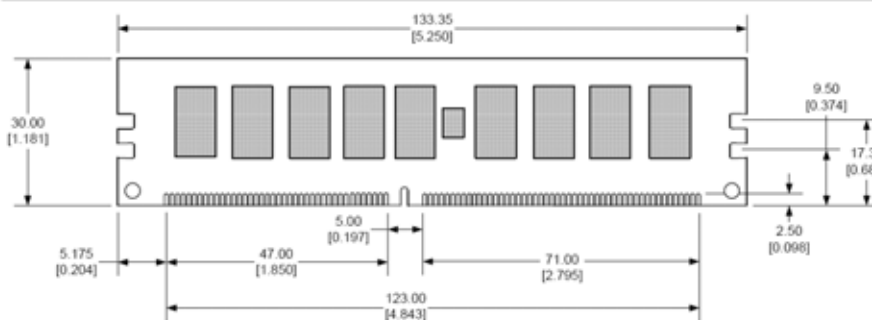


Notes

Tolerances on all dimensions except where otherwise indicated are ± 0.13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

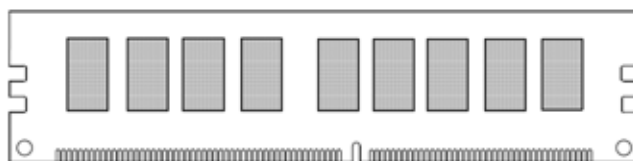

Side view

